

# VIVIX-S 1417S

Portable Flat Panel Detector for Digital Radiography



anytime™

Stable and reliable AED  
(Automatic Exposure  
Detection)



High image quality



Easy installation  
(cassette tray)




Cost-effective  
solution

## Features

- Active area of 14" x 17"
- High spatial resolution with 140um pixel array
- Stable and reliable automatic exposure detection (Anytime™)
- Viewer software running on Windows™ OS (VXvue™)
- Communication interface through Gigabit Ethernet (1000 BASE-T)
- Simple and easy integration with digital radiography system
- Various applications such as General Radiography, Chiropractic, Orthopedic, Veterinary X-ray systems

## Drawing

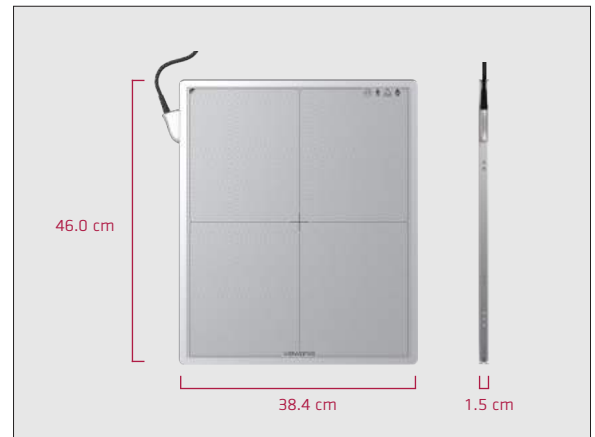

## Technical Specifications

Model Name	FXRD-1417SA	FXRD-1417SB
Technology	a-Si TFT with photodiode	
Scintillator	CsI:Tl	Gd <sub>2</sub> O <sub>2</sub> S:Tb
Pixel Pitch	140 μm	
Spatial Resolution	3.5 lp/mm	
Pixels	2560 x 3072 pixels	
Image Size	14" x 17" (35.8 cm x 43.0 cm)	
Grayscale	14 bit	
Image Acquisition Time	1.2 s	
Recommended Cycle Time	15 s	
Data Interface	Gigabit Ethernet	
X-ray Generator Interface	Line trigger: DR trigger Mode Auto trigger: AED Mode	
Dimensions	38.4 cm x 46.0 cm x 1.5 cm	
Weight	3.2 kg	3.1 kg
Battery	-	
Dust and Water Resistant	IPX3	
X-ray Voltage Range	40 – 150 kVp	
Operating Environment	10°C to 35°C 30 % to 85 % RH (non-condensing)	
Power	DC 24V, 0.5A	

\* Specifications are subject to change without prior notice.

**Distributed By:**